



**IP Packet**



Direct Routing

**Data Frame**

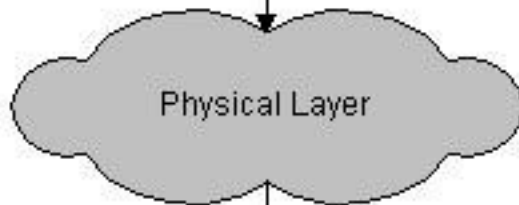

LinuxDirector

Select one real server; directly forward it to the real server.  
LinuxDirector is on the client-to-server half connection.

The real server

Since the VIP is on its loopback alias interface, it processes the packet locally and send response packet to the client directly.